


GSM | GPRS

GE864-GPS Embedded

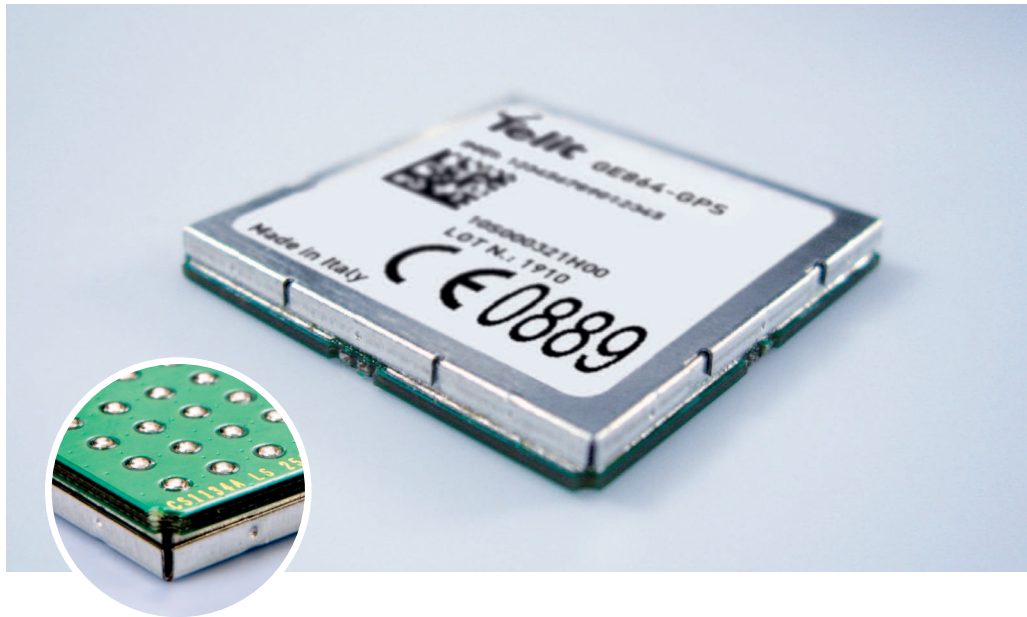

- Ultra Compact
- 48 Channel GPS Architecture
- Telit Unified AT Command Set
- RUN AT Commands Remotely
- BGA Package
- Quad Band GPRS
- GPRS Class 10
- RoHS Compliant
- SIM Access Profile
- PYTHON* Script Interpreter
- Embedded FTP and SMTP Client
- Extended Temperature Range
- Extended RF Sensitivity
- Serial Port Multiplexer (3GPP 27.010)
- Embedded TCP/IP Stack

TELIT INFINITA SERVICES

Premium FOTA Management

The new GE864-GPS is the smallest GSM/GPRS module in the market integrating full 48-channels A-GPS functionality. It combines the high performance from Telit's proven GSM/GPRS core technology with the latest SiRFstarIV™ high sensitivity single-chip A-GPS receiver. The Ball-Grid-Array (BGA) package allows the end application to have a very low profile and small overall dimensions, making it possible for the design of extremely compact location based services solutions. Since connectors are eliminated, the solution cost is significantly reduced as compared to conventional mounting.

With its ultra low profile design, the Telit GE864-GPS is the ideal platform for mobile size sensitive and high-volume applications in areas such as telematics, fleet management, tracking, security, and vehicle navigation. The new A-GPS receiver features an extremely low power consumption adaptive micropower controller to maintain hot start capability, a position resolution accuracy of less than 2.5m, Satellite Based Augmentation System (WAAS, EGNOS, MSAS and GAGAN) as well as assisted GPS. These features combined with the available Python™ application development environment translate into a very cost effective and feature rich platform quite capable of becoming the total solution for the complete customer application. Additional features including jamming detection, integrated TCP/IP protocol stack, and Easy Scan® offer unmatched benefits to the application developer without adding cost.

All Telit modules, support Over-the-Air firmware update by means of Premium FOTA Management. By embedding RedBend's vCurrent® agent, a proven and battle-tested technology powering hundreds of millions of cellular handsets world-wide Telit is able to update its products by transmitting only a delta file, which represents the difference between one firmware version and another.

As part of Telit's corporate policy of environmental protection, all products comply to the RoHS (Restriction of Hazardous Substances) directive of the European Union (EU Directive 2002/95/EG).


Product features

- Quad-band EGSM 850 / 900 / 1800 / 1900 MHz
- GSM/GPRS protocol stack 3GPP Release 4 compliant
- Output power
 - Class 4 (2W) @ 850 / 900 MHz
 - Class 1 (1W) @ 1800 / 1900 MHz
- Control via AT commands according to 3GPP TS 27.005, 27.007 and Telit custom AT commands
- Serial port multiplexer 3GPP TS 27.010
- SIM access profile
- SIM application toolkit 3GPP TS 51.014
- Power consumption (typical values)
 - Power off: < 62 uA
 - Idle (registered, power saving): 1.5 mA @ DRX=9
 - Dedicated mode: < 240 mA @ max power level
 - GPRS cl.10: < 420 mA @ max power level
- Supply voltage range: 3.22-4.5 V DC (3.8 V DC recommended)
- TCP/IP stack access via AT commands
- Sensitivity:
 - 107 dBm (typ.) @ 850 / 900 MHz
 - 106 dBm (typ.) @ 1800 / 1900 MHz
- Dimensions: 30 x 30 x 2.8 mm
- Weight: 6 grams
- Extended temperature range
 - 40°C to +85°C (operational)
 - 40°C to +85°C (storage temperature)
- RoHS compliant
- DARP/SAIC support
- High sensitivity A-GPS receiver

Making machines talk.®

GE864-GPS

Embedded



actual size

Telit® wireless solutions

Telit Communications S.p.A.
Via Stazione di Prosecco, Suite 135
I-34010 Sgonico (Trieste), Italy
Tel +39 040 4192 200
Fax +39 040 4192 289
E-Mail: EMEA@telit.com

Telit Wireless Solutions Inc.
3131 RDU Center Drive, Suite 135
Morrisville, NC 27560, USA
Tel +1 888 846 9773 or +1 919 439 7977
Fax +1 888 846 9774 or +1 919 840 0337
E-Mail: NORTHAMERICA@telit.com

Telit Wireless Solutions Inc.
Rua Cunha Gago, 700 - cj 81, Pinheiros
São Paulo - SP, 05421001, Brazil
Tel +55 11 2679 4654
Fax +55 11 2679 4654
E-Mail: LATINAMERICA@telit.com

Telit Wireless Solutions Co., Ltd.
12th Fl., Shinyoung Securities Bld.
34-12, Yeouido-dong, Yeongdeungpo-gu
Seoul, 150-884, Korea
Tel. +82 2 368 4600
Fax +82 2 368 4606
E-Mail: APAC@telit.com

www.telit.com
www.telit.com/techforum
www.telit.com/facebook
www.telit.com/twitter

Distributed by:

GPS receiver

- GPS power consumption:
Acquisition: 81mW, Tracking : 58 mW
- Integrated LNA
- High sensitivity for indoor reception,
up to -163 dBm
- Accuracy < 2.5 m
- Extremely fast TTFF's at low signal levels
- Hot start < 1s
- Warm start < 35 s
- Cold start < 35 s
- Active Jamming Remover
- Supports 48-channel GPS, L1 1575.42 MHz
- GPS NMEA 0183 output format
- Date WGS-84
- Dedicated GPS AT commands
- SBAS (WAAS , EGNOS, MSAS, GAGAN)
support
- Optional Assisted GPS feature

Interfaces

- 10 I/O ports maximum
- Analog audio (balanced)
- 2 A/D plus 1 D/A converter
- Buzzer output
- ITU-T V.24 serial link through CMOS UART:
 - Baud rate from 300 to 115,200 bps
 - Autobauding up to 115,200 bps
 - 2 GPS serial ports
 - PPS signal

Audio

- Telephony, emergency call
- Half rate, full rate, enhanced full rate
and adaptive multi rate voice codecs
(HR, FR, EFR, AMR)
- Superior echo cancellation & noise
reduction
- Multiple audio profiles pre-programmed and
fully configurable by mean AT commands
- DTMF

Approvals

- Fully type approved conforming with
R&TTE directive
- CE, GCF, FCC, PTCRB, IC, Anatel

SMS

- Point-to-point mobile originated and
mobile terminated SMS
- Concatenated SMS supported
- SMS cell broadcast
- Text and PDU mode
- SMS over GPRS

Circuit switched data transmission

- Asynchronous non-transparent CSD
up to 9.6 kbps
- V.110

GPRS data

- GPRS class 10
- Mobile station class B
- Coding scheme 1 to 4
- PBCCH support
- GERAN Feature Package 1 support (NACC,
Extended TBF)

GSM supplementary

- Call forwarding
- Call barring
- Call waiting & call hold
- Advice of charge
- Calling line identification presentation (CLIP)
- Calling line identification restriction (CLIR)
- Unstructured supplementary services mobile
originated data (USSD)
- Closed user group

Additional features

- SIM phonebook
- Fixed dialing number (FDN)
- Real-time clock
- Alarm management
- Network LED support
- IRA, GSM, 8859-1 and UCS2 character set
- Jamming detection
- Embedded TCP/IP stack, including TCP,
IP, UDP, SMTP, ICMP and FTP protocols
- PFM (Premium FOTA Management)
Over-The-Air Update service
- Remote AT commands
- Event monitor

Python* application resources

- Python* script interpreter (module
takes the application code directly in the
Python* language)
- Memory: 1.9 MB of NV memory for
the user scripts and 1 MB RAM for the
Python* engine usage
- Over-the-air application SW update
- Script execution speed increased up to 4
times compared to the GE864-QUAD



Telit's EASY features

- EASY SCAN® automatic scan over GSM
frequencies (also without SIM card)

Order-No.

Please contact your Telit representative
for order codes and all further information

Copyright © 2011, Telit
Subject to changes in technology, design and availability
* Copyright © 1991-1995 by Stichting Mathematisch
Centrum, Amsterdam, The Netherlands,
All Rights Reserved.
Copyright © 1995-2001 Corporation for National
Research Initiatives; All Rights Reserved.
Copyright © 2001-2010 Python Software Foundation;
All Rights Reserved.
All Rights Reserved are retained in Python.