


GSM | GPRS

GE864-QUAD

Embedded

GE864-PY

Embedded

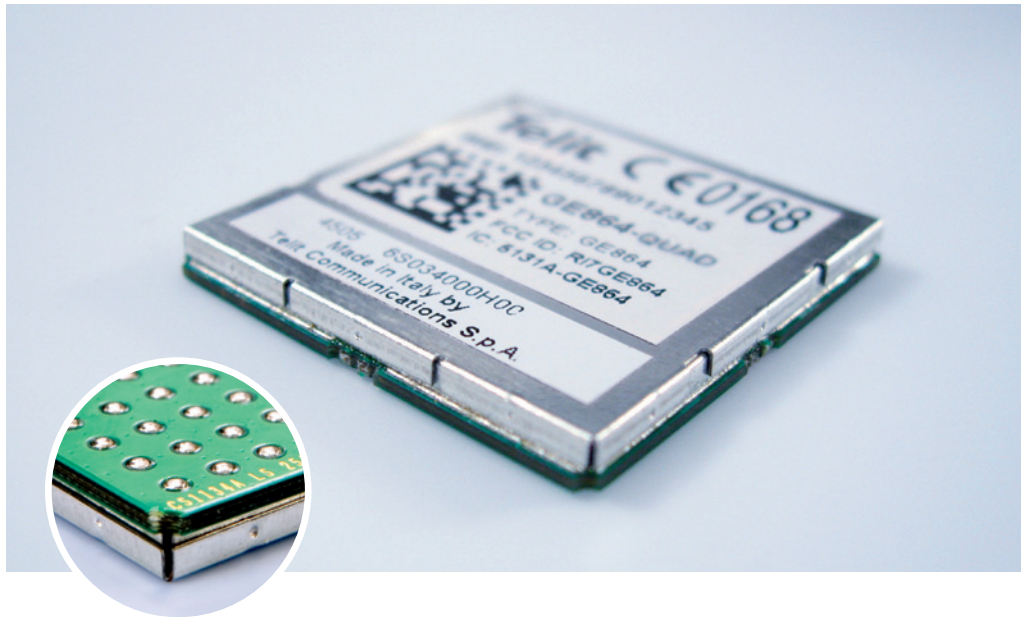

	Ultra Compact
	Telit Unified AT Command Set
	BGA Package
	Quad Band GPRS
	GPRS Class 10
	RoHS Compliant
	SIM Access Profile
	PYTHON* Script Interpreter
	Embedded FTP and SMTP Client
	Extended Temperature Range
	Extended RF Sensitivity
	Serial Port Multiplexer (GSM 7.10)
	Embedded TCP/IP Stack



TELIT INFINITA SERVICES



The new GE864 product family introduces the smallest GSM/GPRS Ball-Grid-Array (BGA) modules in the market.

The low profile and small size of the unique BGA package for the GE864-QUAD and GE864-PY enable the design of very compact applications. Since connectors are eliminated, the solution cost is significantly reduced compared to conventional mounting.

With its ultra-compact design and extended temperature range, the Telit GE864 product line is the perfect platform for high-volume m2m applications and mobile data devices. Additional features such as integrated TCP/IP protocol stack and serial multiplexer extend functionality of the application at no additional cost.

The GE864-PY makes it possible to run the customer's application inside the module, thus making it the smallest, complete platform for m2m solutions. State-of-the-art SPI and IIC interfaces provide connectivity to external peripherals such as sensors and displays.

All Telit modules, support Over-the-Air firmware update by means Premium FOTA Management. By embedding RedBend's vCurrent® agent, a proven and battle-tested technology powering hundreds of millions of cellular handsets world-wide Telit is able to update its products by transmitting only a delta file, which represents the difference between one firmware version and another.

As a part of Telit's corporate policy of environmental protection, all products comply to the RoHS (Restriction of Hazardous Substances) directive of the European Union (EU Directive 2002/95/EG).

Product features

- Quad-band EGSM 850 / 900 / 1800 / 1900 MHz
- Output power
 - Class 4 (2W) @ 850 / 900 MHz
 - Class 1 (1W) @ 1800 / 1900 MHz
- Control via AT commands according to GSM 07.05, 07.07 and Telit enhancements
- Serial port multiplexer GSM 7.10
- SIM access profile
- Supply voltage range: 3.22-4.5 V DC [3.8 V DC recommended]
- TCP/IP stack access via AT commands
- Power consumption (typical values)
 - Power off: < 26 uA
 - Idle (registered, power saving): < 4 mA
 - Dedicated mode: 200 mA
 - GPRS cl.10: 370 mA
- Sensitivity:
 - 107 dBm (typ.) @ 850 / 900 MHz
 - 106 dBm (typ.) @ 1800 / 1900 MHz
- Dimensions: 30 x 30 x 2.8 mm
- Weight: 6 grams
- Extended temperature range
 - 40°C to +85°C (operational)
 - 40°C to +85°C (storage temperature)
- RoHS compliant

