


GSM | GPRS

GE864-QUAD V2 Embedded

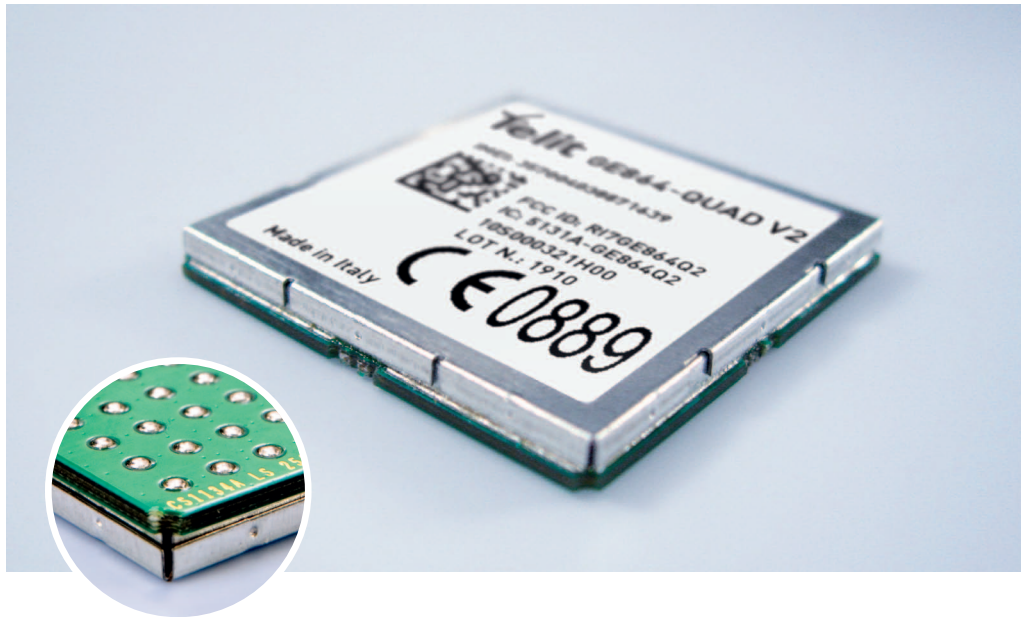

- Ultra Compact
- Telit Unified AT Command Set
- RUN AT Commands Remotely
- BGA Package
- Quad Band GPRS
- GPRS Class 10
- RoHS Compliant
- SIM Access Profile
- PYTHON* Script Interpreter
- Embedded FTP and SMTP Client
- Extended Temperature Range
- Extended RF Sensitivity
- Serial Port Multiplexer (3GPP 27.010)
- Embedded TCP/IP Stack

TELIT INFINITA SERVICES

Premium FOTA Management

The V2 family is the new generation of Telit modules which offers most of the features of the previous versions plus a GSM/GPRS protocol stack 3GPP Release 4, the Downlink Advance Receiver Performance [DARP] feature for Single Antenna Interference Cancellation (SAIC), the Enhanced Measurement Report, GERAN Feature package 1, which assists in supporting the Extended Uplink TBF and Network Assisted Cell Change (NACC), the control via remote AT Commands and Event Monitor.

The new GE864-QUAD V2 product introduces the smallest GSM/GPRS Ball-Grid-Array (BGA) modules in the market. The low profile and small size of the unique BGA package of the GE864-QUAD V2 enables the design of very compact applications. Since connectors are eliminated, the solution cost is significantly reduced compared to conventional mounting.

With its ultra-compact design and extended temperature range, the Telit GE864 product line is the perfect platform for high-volume m2m applications and mobile data devices. Additional features such as integrated TCP/IP protocol stack and serial multiplexer extend functionality of the application at no additional cost.

The GE864-QUAD V2 makes it possible to run the customer's application inside the module, thus making it the smallest, complete platform for m2m solutions.

All Telit modules, support Over-the-Air firmware update by means Premium FOTA Management. By embedding RedBend's vCurrent[®] agent, a proven and battle-tested technology powering hundreds of millions of cellular handsets world-wide Telit is able to update its products by transmitting only a delta file, which represents the difference between one firmware version and another.

As a part of Telit's corporate policy of environmental protection, all products comply to the RoHS (Restriction of Hazardous Substances) directive of the European Union (EU Directive 2002/95/EG).


Product features

- Quad-band EGSM 850 / 900 / 1800 / 1900 MHz
- GSM/GPRS protocol stack 3GPP Release 4 compliant
- Output power
 - Class 4 (2W) @ 850 / 900 MHz
 - Class 1 (1W) @ 1800 / 1900 MHz
- Control via AT commands according to 3GPP TS 27.005, 27.007 and Telit custom AT commands
- Serial port multiplexer 3GPP TS 27.010
- SIM access profile
- SIM application toolkit 3GPP TS 51.014
- Power consumption (typical values)
 - Power off: < 62 uA
 - Idle (registered, power saving): 1.5 mA @ DRX=9
 - Dedicated mode: < 240 mA @ max power level
 - GPRS cl.10: < 420 mA @ max power level
- Supply voltage range: 3.22-4.5 V DC (3.8 V DC recommended)
- TCP/IP stack access via AT commands
- Sensitivity:
 - 107 dBm (typ.) @ 850 / 900 MHz
 - 106 dBm (typ.) @ 1800 / 1900 MHz
- Dimensions: 30 x 30 x 2.8 mm
- Weight: 6 grams
- Extended temperature range
 - 40°C to +85°C [operational]
 - 40°C to +85°C [storage temperature]
- RoHS compliant
- DARP/SAIC support

Making machines talk.[®]

GE864-QUAD V2

Embedded



actual size



Telit Communications S.p.A.
Via Stazione di Prosecco, 5/B
I-34010 Sgonico (Trieste), Italy
Tel +39 040 4192 200
Fax +39 040 4192 289
E-Mail: EMEA@telit.com

Telit Wireless Solutions Inc.
3131 RDU Center Drive, Suite 135
Morrisville, NC 27560, USA
Tel +1 888 846 9773 or +1 919 439 7977
Fax +1 888 846 9774 or +1 919 840 0337
E-Mail: NORTHAMERICA@telit.com

Telit Wireless Solutions Inc.
Rua Cunha Gago, 700 - cj 81, Pinheiros
São Paulo - SP, 05421001, Brazil
Tel +55 11 2679 4654
Fax +55 11 2679 4654
E-Mail: LATINAMERICA@telit.com

Telit Wireless Solutions Co., Ltd.
9th Fl., Daewoo Securities Bld.
34-3 Yeouido-dong, Yeongdeungpo-gu
Seoul 150-716, KOREA
Tel +82 2 368 4600
Fax +82 2 368 4606
E-Mail: APAC@telit.com

www.telit.com

Distributed by:

Interfaces

- 10 I/O ports maximum
- Analog audio (balanced)
- 2 A/D plus 1 D/A converter
- Buzzer output
- ITU-T V.24 serial link through CMOS UART:
 - Baud rate from 300 to 115,200 bps
 - Autobauding up to 115,200 bps

Audio

- Telephony, emergency call
- Half rate, full rate, enhanced full rate and adaptive multi rate voice codecs (HR, FR, EFR, AMR)
- Superior echo cancellation & noise reduction
- Multiple audio profiles pre-programmed and fully configurable by mean AT commands
- DTMF

Approvals

- Fully type approved conforming with R&TTE directive
- CE, GCF, FCC, PTCRB, IC, Anatel

SMS

- Point-to-point mobile originated and mobile terminated SMS
- Concatenated SMS supported
- SMS cell broadcast
- Text and PDU mode
- SMS over GPRS

Circuit switched data transmission

- Asynchronous non-transparent CSD up to 9.6 kbps
- V.110

GPRS data

- GPRS class 10
- Mobile station class B
- Coding scheme 1 to 4
- PBCCH support
- GERAN Feature Package 1 support (NACC, Extended TBF)

GSM supplementary

- Call forwarding
- Call barring
- Call waiting & call hold
- Advice of charge
- Calling line identification presentation (CLIP)
- Calling line identification restriction (CLIR)
- Unstructured supplementary services mobile originated data (USSD)
- Closed user group

Additional features

- SIM phonebook
- Fixed dialing number (FDN)
- Real-time clock
- Alarm management
- Network LED support
- IRA, GSM, 8859-1 and UCS2 character set
- Jamming detection
- Embedded TCP/IP stack, including TCP, IP, UDP, SMTP, ICMP and FTP protocols
- PFM (Premium FOTA Management) Over-The-Air Update service
- Remote AT commands
- Event monitor

Python* application resources

- Python* script interpreter (module takes the application code directly in the Python* language)
- Memory: 1.9 MB of NV memory for the user scripts and 1 MB RAM for the Python* engine usage
- Over-the-air application SW update
- Script execution speed increased up to 4 times compared to the GE864-QUAD



Telit's EASY features

- EASY SCAN® automatic scan over GSM frequencies (also without SIM card)

Order-No.

Please contact your Telit representative for order codes and all further information

Copyright © 2010, Telit - Subject to changes in technology, design and availability

* Copyright © 1991-1995 by Stichting Mathematisch Centrum, Amsterdam, The Netherlands; All Rights Reserved.
Copyright © 1995-2001 Corporation for National Research Initiatives; All Rights Reserved.
Copyright © 2001-2010 Python Software Foundation; All Rights Reserved.
All Rights Reserved are retained in Python.

